

SHAYD / SHAYD XL PENDANT





WARNING:

Turn off power at circuit before wiring.
Always consult a licensed electrician.

SHAYD XL :

2 people are required for assembly.


PARTS AND HARDWARE



INSTALLATION INSTRUCTIONS


- 1 Unroll the SHAYD shade and let it rest until completely flat, approx. 24–48 hrs, weighing it down if needed.
- 2 Unscrew the brass screw at the bottom of the diffuser, separating it from the LED board.
- 3 Remove brass screw and diffuser, set aside.
- 4 Pull the LED board out of ceramic top so it is approx 2 ft away from ceramic top.
- 5 Insert the LED board through cut-out hole in shade, aligning markings with the diagram.
- 6 Gently fold the shade using notches as guides, DO NOT press hard or creases may form.
- 7 Shape shade to match the shape of the ceramic form, then slide it inside the ceramic top.
NOTE: For Shayd XL while one person shapes and inserts the shade the other holds the ceramic top.

1

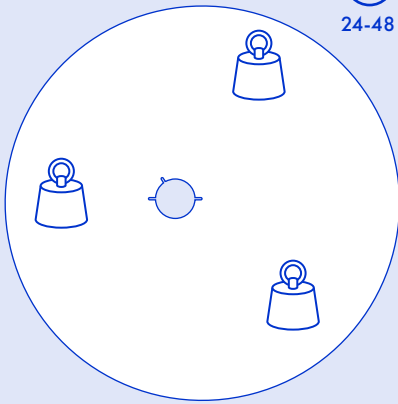


NOTCHES = FOLD MARKERS


2




3




4

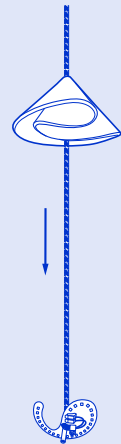


5

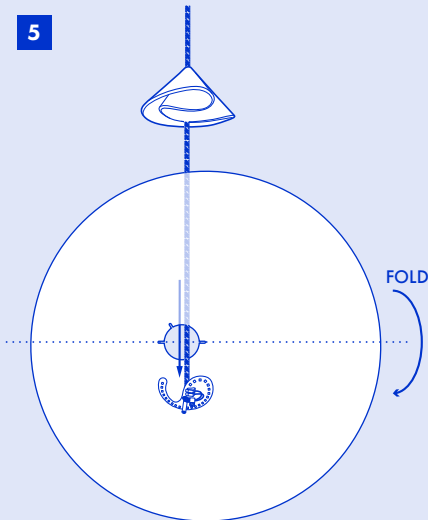

6

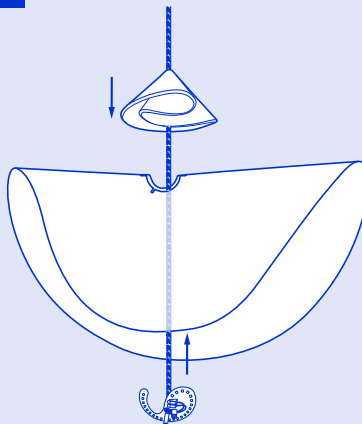

7

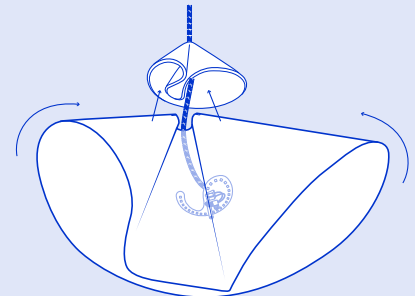

SHAYD / SHAYD XL PENDANT



WARNING:





Turn off power at circuit before wiring.
Always consult a licensed electrician.

SHAYD XL :

2 people required for assembly

INSTALLATION INSTRUCTIONS (CONT.)

- 8** Slide the LED board into place so it rests in the cone, with the shade positioned between the ceramic and the board.
- 9** Adjust the placement of the LED board as needed to follow the shape of the interior of the shade.
- 10** Insert the diffuser so it fits snugly in the fixture, with the hole aligned to the metal standoff. Secure it in place with the brass screw.
- 11** Adjust placement of the diffuser as needed so it follows the shape of the interior of shade.

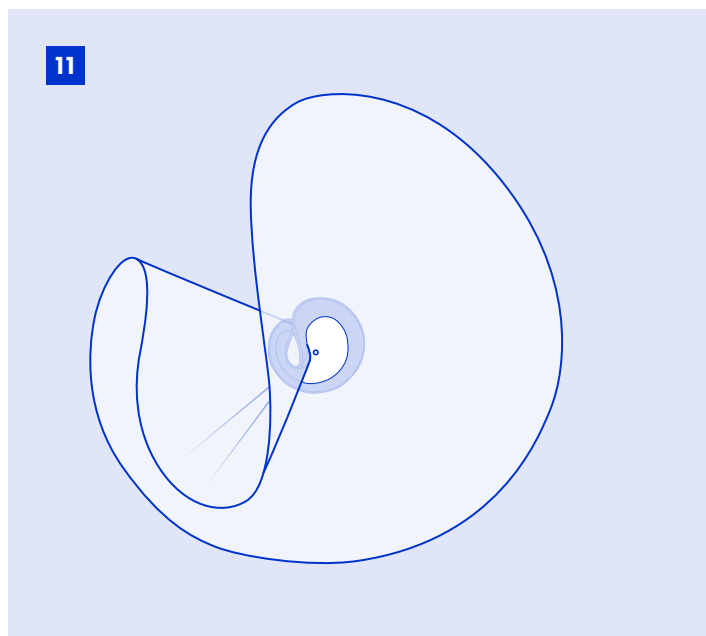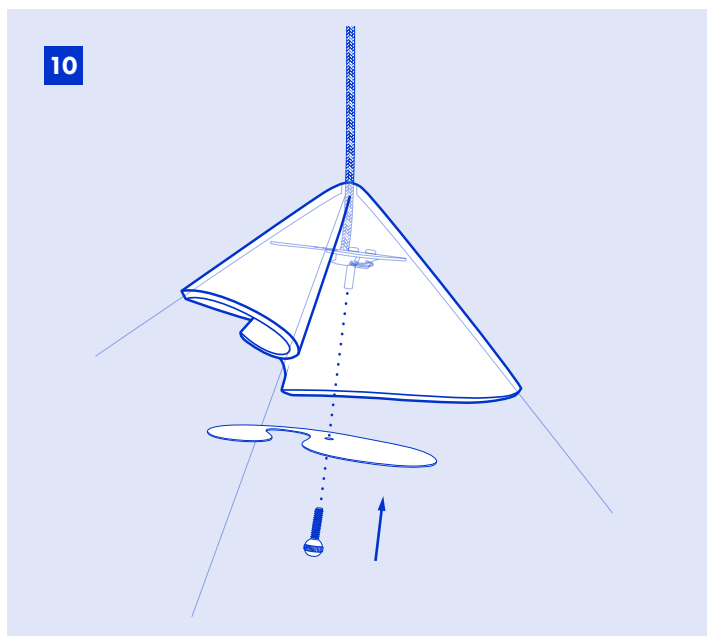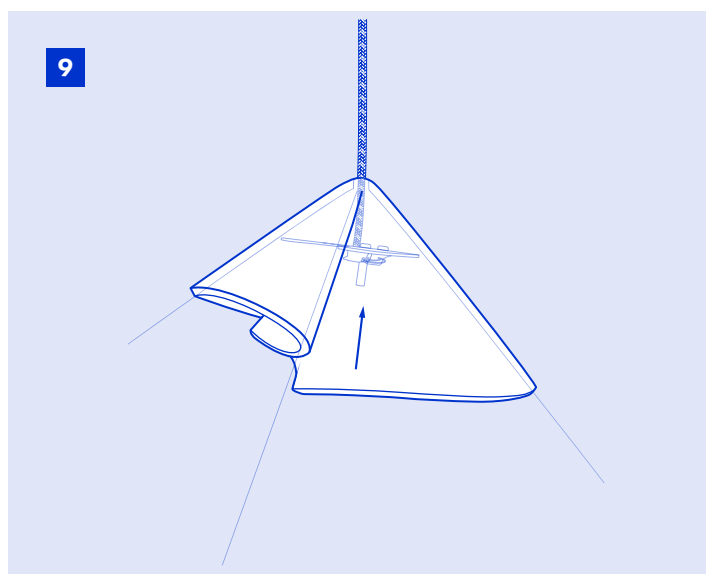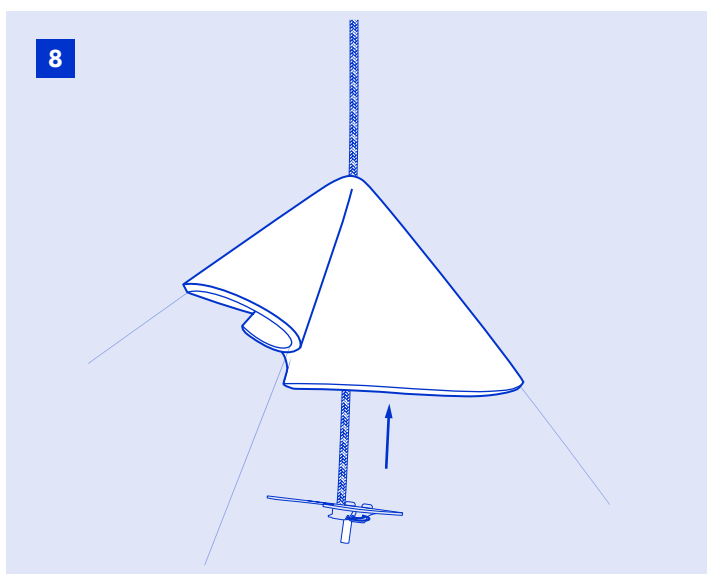

SHAYD / SHAYD XL PENDANT

**WARNING:**

Turn off power at circuit before wiring.
Always consult a licensed electrician.

SHAYD XL :

2 people required for assembly

INSTALLATION INSTRUCTIONS (CONT.)

- 12** Thread cord through canopy and crossbar, make electrical connections, and place driver into J-box. Attach crossbar to J-box, and attach canopy.

